


RAFTER point LED wall / RAFTER LED wall

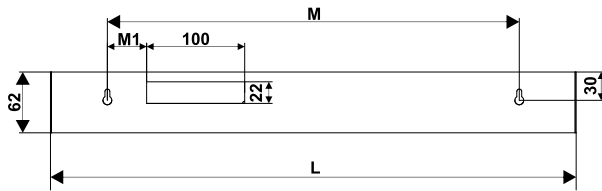

Źródło światła zastosowane w tej oprawie oświetleniowej powinno być wymieniane wyłącznie przez producenta lub jego przedstawiciela serwisowego, lub podobnie wykwalifikowaną osobę.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

RAFTER LED wall				
L [mm]	290	570	860	1140
M [mm]	230	450	740	1020
M1 [mm]	95	55	320	460
RAFTER points LED wall				
L [mm]	270	540	800	1070
M [mm]	220	420	680	950
M1 [mm]	90	40	290	425

1

Diagram showing the fixture being secured to a ceiling surface using screws. A screwdriver is shown driving a screw into the mounting holes.

2

Diagram showing the fixture being connected to a power supply unit. Wires are connected to terminals labeled L, N, and a ground symbol. A circular inset shows a close-up of the terminal block with a 'push' arrow and labels L, N, and a ground symbol. Arrows labeled II and III indicate the direction of the fixture's movement.

3

Diagram showing the final view of the RAFTER LED wall fixture installed on the ceiling.

~
230 V

⊕
⊖

☾
>0,2 m

▶

DIMMER
option

□
/ \

⚡

LED
INT.